


FIRE RESISTANT TESTING TEMPERATURE CHART

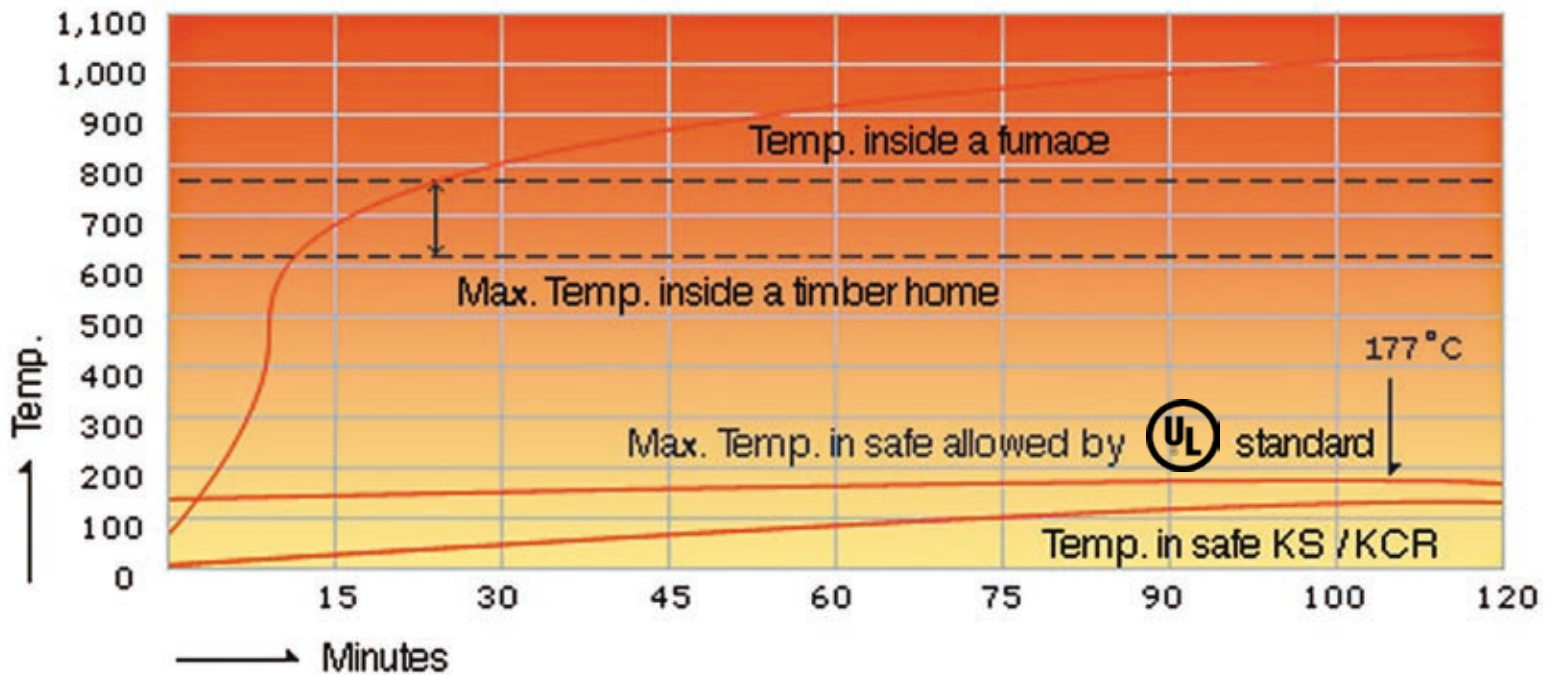

 UNDERWRITERS LABORATORIES

IF YOU CAN'T FIND THE SAFE YOU NEED. GUARDALL CAN CUSTOM BUILD YOUR SAFE. THIS ALLOWS US TO GUARANTEE SATISFACTION, NO MATTER WHAT YOUR NEEDS, WHETHER IT BE BUSINESS, OFFICE, CLUBS, HOME OR LEGAL. NO MATTER HOW SPECIALISED THESE NEEDS MAY BE, GUARDALL SAFES CAN BE DESIGNED TO A LEVEL OF SUITABILITY AND SECURITY THAT WILL SATISFY EVEN THE MOST RIGOROUS REQUIREMENTS.

DISTRIBUTOR DETAILS:



HIGH SECURITY SAFES **Guardall**



K-CR9E

Guardall K-S SERIES

SECURITY AND FIRE RESISTANT SAFES

THIS SERIES OF SAFES MEET BOTH THE IATA TRAVEL AND PHARMACY GUILD SPECIFICATIONS FOR SECURE STORAGE

FEATURES

HIGH QUALITY USA MANUFACTURED LAGARD DIGITAL LOCK
12MM SOLID PLATE STEEL DOOR
32MM BOLTWORK
12MM HEAT TREATED HARD PLATE PROTECTING LOCKWORK
SECONDARY RE-LOCKING DEVICE IN CASE OF TAMPERING
ADJUSTABLE SHELVING
BOLT DOWN FACILITY
FIRE RESISTANT FOR 1 HOUR
STURDY HAMMERTONE POLYURETHANE EXTERIOR FINISH
RECOMMENDED INSURABLE CASH RATING IN AN UNSUPPORTED SITUATION \$30,000.00
ALSO AVAILABLE ARE DIFFERENT LOCKING CONFIGURATIONS, INCLUDING:
TIME DELAY, DUAL USERS, KEY AND ELECTRONIC COMBINATION, SINGLE AND DUAL KEY LOCKS.



K-S7

		HEIGHT	WIDTH	DEPTH	WEIGHT	SHELVES
K-S1	EXTERNAL	630	580	500	510 KG	2
	INTERNAL	500	430	345		
K-S2	EXTERNAL	750	580	500	535 KG	3
	INTERNAL	620	430	345		
K-S4	EXTERNAL	1100	650	620	600 KG	3
	INTERNAL	970	520	450		
K-S7	EXTERNAL	1400	650	670	800 KG	5
	INTERNAL	1270	520	430		

PLEASE BE SURE TO DISCUSS THE LEVEL OF SECURITY YOU REQUIRE
WE WILL FIND THE PERFECT SOLUTION TO YOUR INDIVIDUAL NEEDS

Guardall **K-CR SERIES**

FULL TDR HIGH SECURITY

THE K-CR SERIES IS IDEAL WHERE MAXIMUM SECURITY IS NECESSARY SITUATIONS INCLUDE JEWELLERS, BANKS, HIGH CASH TURN OVER OUTLETS SUCH AS RESTAURANTS, PUBS, NIGHTCLUBS, SUPERMARKETS & CINEMAS, TO NAME A FEW

FEATURES



K-CR4

**HIGH QUALITY USA MANUFACTURED LAGARD DIGITAL LOCK
SOLID 32MM 4-WAY BOLT WORK WITH 12 LOCKING
POINTS ON THE DOOR
SOLID STEEL PLATE COVERING THE ENTIRE FRONT
DOOR.
STEEL MESH IN ALL SIX SIDES OF THE SAFE
ENSCAPULATED IN CONCRETE & REFRACTORY
MATERIALS MAKING UP THE SLAB.
BODY AND DOOR THICKNESS ALL 90MM
HARDENED STEEL PLATE COVERING ALL VITAL
LOCKING POINTS
SECONDARY RE-LOCKING MECHANISM IN CASE OF
TAMPERING
LARGE HEAVY GRADE STEEL BLOCK HINGES
TWO RECESSED BOLTING POINTS IN THE BASE OF THE
SAFE FOR SECURE ANCHORING TO ANY SURFACE
RECOMMENDED INSURABLE CASH RATING IN AN
UNSUPPORTED SITUATION \$100,000.00**

THE DESIGN OF THESE SAFES ARE MADE TO GIVE A HIGH LEVEL OF RESISTANCE TO PROFESSIONAL ATTACK BY MEANS SUCH AS: DRILLING AND GRINDING, OXY-ACETYLENE CUTTING EQUIPMENT, EXPLOSIVES, PNEUMATIC AND HYDRAULIC TOOLS

		HEIGHT	WIDTH	DEPTH	WEIGHT	SHELVES
K-CR1	EXTERNAL	630	580	530	580 KG	2
	INTERNAL	500	430	345		
K-CR3	EXTERNAL	900	580	530	680 KG	2
	INTERNAL	770	430	345		
K-CR4	EXTERNAL	1100	740	780	793 KG	3
	INTERNAL	920	540	530		
K-CR7	EXTERNAL	1400	740	780	1000 KG	5
	INTERNAL	1200	540	530		
K-CR9	EXTERNAL	1700	740	780	1300 KG	5
	INTERNAL	1520	560	547		
K-CR9E	EXTERNAL	1700	1040	1140	2000 KG	10
	INTERNAL	1520	880	905		